


## PAC SERIES – AC Motor Start Capacitors

- Vibration Resistant Design
- For Fractional HP Motors
- Screw Terminal Heavy duty load series also available



### SPECIFICATIONS

	Parameter	Performance
1	Operating Temperature Range	- 25°C ~ 70°C
2	Rated Voltage Range	230 Vrms
3	Surge Voltage	275 Vrms
4	Duty Cycle	Maximum of 20 starts per hour, each start not more than 3 seconds duration at rated voltage
5	Shelf Life	One Year
7	Power Factor at 230Vrms, 50 Hz, 25oC	10% max.
	Insulation Voltage	Can withstand 2000Vrms for one minute between termination and outer case.
8	Polarity	None
9	Other Details	As per IS 2993

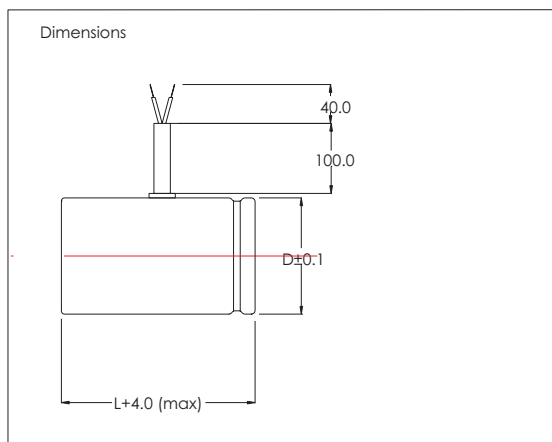

Capacitance Value	Motor Rating	Case Size	
		PAC	PA2
µF	HP		
20-25	1/8	35x80	30x50
30-40	1/6	40x80	35x60
40-60	1/4	40x80	35x60
60-80	1/3	40x80	35x60
80-100	1/2	40x100	35x80
100-120	2/3	40x100	35x80
120-150	1	40x100	40x80
150-200	5/4	45x125	40x100
200-250	5/4	45x125	40x100